


Wireless coax
50 Ohm transmission cable
Coax RG/8X

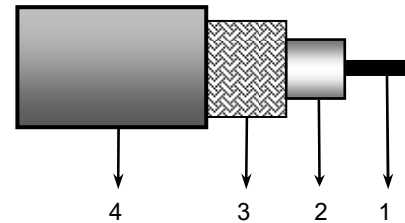

Applications

- 50 Ohm low loss coaxial transmission cable designed according European Standard EN 50117-1
- Operating frequencies between 5 and 6000 MHz

Construction & Dimensions

1. Inner conductor	stranded bare copper 19x0.28 mm
Material Diameter	1.42 mm ± 0.03 mm
2. Dielectric	Gas injected PE
Material Diameter	3.94 mm ± 0.15 mm
Centricity	≥ 85%
3. Braid	bare copper
Material Diameter	95% ± 5%
Coverage braid	
4. Sheath Material	PVC
Diameter	6.15 mm ± 0.15 mm

Mechanical characteristics

Parameter	Specification	Unit
Tensile strength of sheath	≥ 12.5	N/mm ²
Elongation at break of sheath	≥ 150	%
Adhesion dielectric @ 25mm	5-50	N
Crush resistance of cable (load of 700N)	< 1	%
Maximum tensile strength of cable	100	N
Minimum static bend radius	60	mm

Electrical characteristics

Test methods in accordance with European standard EN 50117-1

Parameter	Specification	Unit
Mean characteristic impedance	50 ± 3	Ω
Regularity of Impedance	> 40	dB
DC loop resistance	≤ 32.4	Ω/km
DC resistance inner conductor	≤ 15.4	Ω/km
DC resistance outer conductor	≤ 17	Ω/km
Capacitance	84 ± 3	pF/m
Velocity ratio	$80\% \pm 2\%$	
Insulation resistance	$> 10^4$	M Ω .km
Voltage test of dielectric	2	kVdc
Screening Attenuation		
	30-1000 MHz	≥ 85
Return loss at		
	5-30 MHz	$\geq 20^*$
	30-470 MHz	$\geq 20^*$
	470-1000 MHz	$\geq 18^*$
	1000-2000 MHz	$\geq 16^*$
	2000-3000 MHz	$\geq 15^*$
	3000-6000 MHz	$\geq 15^{**}$

Attenuation at:	Nominal	Unit
5 MHz:	2.5	dB/100m
50 MHz:	6.9	dB/100m
100 MHz:	9.1	dB/100m
230 MHz:	13.4	dB/100m
400 MHz:	18.0	dB/100m
800 MHz:	26.1	dB/100m
862 MHz:	27.3	dB/100m
1000 MHz:	29.6	dB/100m
1350 MHz:	34.9	dB/100m
Maximum attenuation is 10% higher		

Attenuation at:	Nominal	Unit
1750 MHz:	40.3	dB/100m
2150 MHz:	46.0	dB/100m
2400 MHz:	49.1	dB/100m
3000 MHz:	56.3	dB/100m
3600 MHz:	62.9	dB/100m
4200 MHz:	69.1	dB/100m
4800 MHz:	75.1	dB/100m
5400 MHz:	80.8	dB/100m
6000 MHz:	86.5	dB/100m

Environmental and overall characteristics

Parameter	Specification	Unit
Storage/operating temperature	-15 to +70	$^{\circ}\text{C}$
Minimum installation temperature	-5	$^{\circ}\text{C}$