




Power Supply NS-2230M, NS-2230

SPECIFICATION

Model	NS-2230M	NS-2230D
Input voltage	220VAC \pm 10% 50Hz or 110VAC \pm 10 % 60Hz	
Output voltage	13.8V or 9-15V variable	
Output voltage regulation	< 2 %	
Protection	Overload, Over voltage, Short-circuit	
Output current	28A continue , 30A Max.	
Ripple/Noise	< 80mVp-p	
Fuse	4A / 250V, 8A / 120V	
Display indicator	Single analog meter	LCD display
Dimensions (W/H/L)	163 x 53 x191 mm	165 x 80 x 200 mm
Weight	1.3 Kg	1.54 Kg


FRONT PANEL

1. Power switch "ON/OFF"
2. Meter switch. (only NS-2230M)
3. Voltage adjustment
4. Output terminal(1): Anderson power poles
5. Power indicator

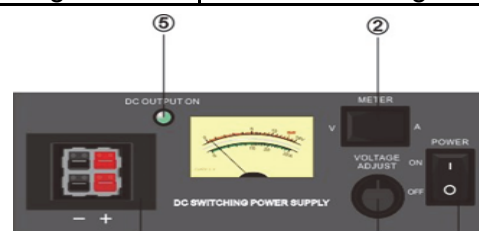

REAR PANEL

6. Output terminal (2):Five-Way binding post
7. Cooling fan
8. AC input power & Fuse

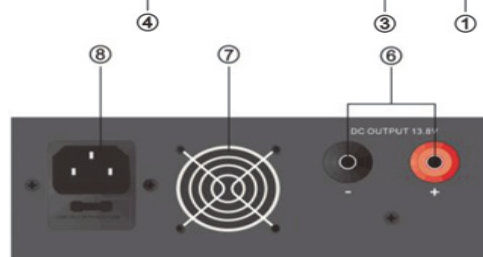

Photo

NS-2230M



NS-2230D (Aluminum panel)



CE / LVD / RoHS