

# SCAN STICK 2000

The SCAN STICK 2000 is a special designed antenna, for frequencies used all over Europe.

By using special techniques, this wideband antenna is developed featuring a very good performance and therefore it is ideal as a broadband scanner antenna.

Designing this antenna, special attention was paid for good reception on the following bands:

26 - 28 MHz  
31 - 32 MHz  
75 - 108 MHz  
108 - 140 MHz  
140 - 150 MHz  
150 - 180 MHz  
400 - 500 MHz  
860 - 870 MHz  
890 - 910 MHz  
930 - 970 MHz

**Use this antenna to increase your listening pleasure.**

**avera B.V. THE NETHERLANDS**

Fax : +(31) (0)76 596 3833

email : info@avera.eu




www.avera.eu

SCAN STICK 2000 is available as:

- \* p/n MAGN ASB001 **Base version**  
Equipped with anodized aluminium bracket for an easy side mast installation
- \* p/n MAGN ASM001 **Mobile version Mag Mount**  
Antenna plus Magnetic Mount including cable plus BNC connector
- \* p/n MAGN ASM002 **Mobile Version Surface**  
Surface Mount Antenna including cable plus BNC connector
- \* p/n MAGN ASW001 **Whip Only**

Technical specifications :

- \* Band wide : 25 - 2000 MHz
- \* Whip : Length 715 mm  
Coated with UV - resistant black PVC  
Threaded Ferrule 3/8" x24  
Diameter 9 mm, Aluminum Coated Fiberglass
- \* Magnetic Mount Type : Cable Length +/- 4000 mm  
Connector BNC  
Diameter Magnetic Mount 160 mm
- \* Surface Mount Type : Mount 3/8" x 24 Threat Ferrule  
Cable Length +/- 5400 mm

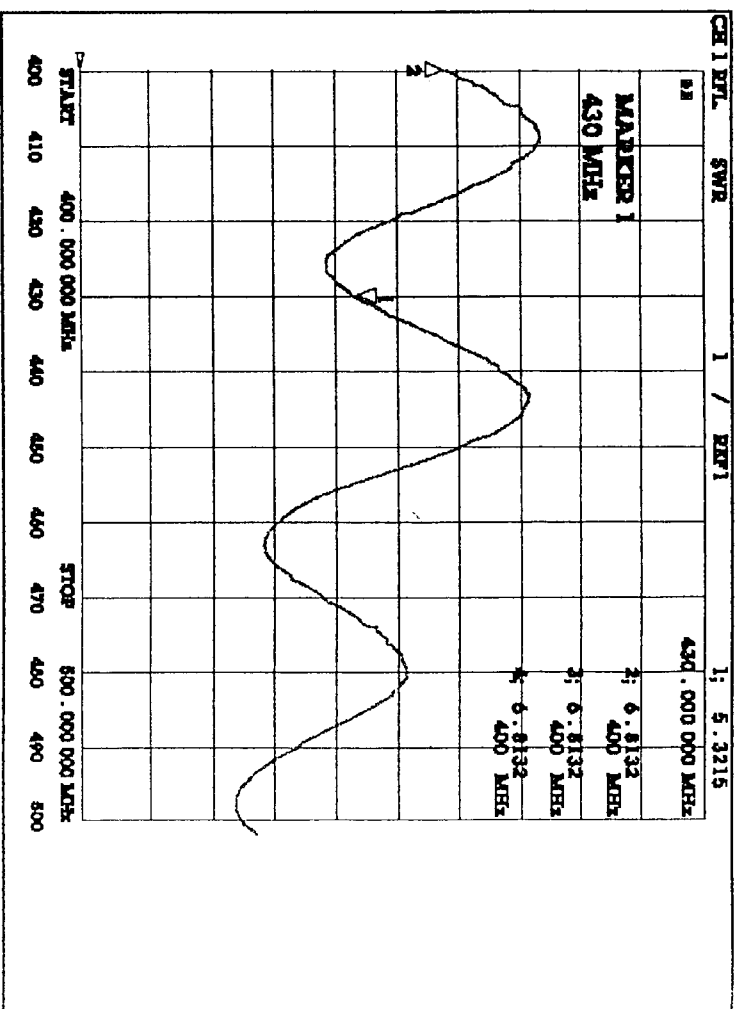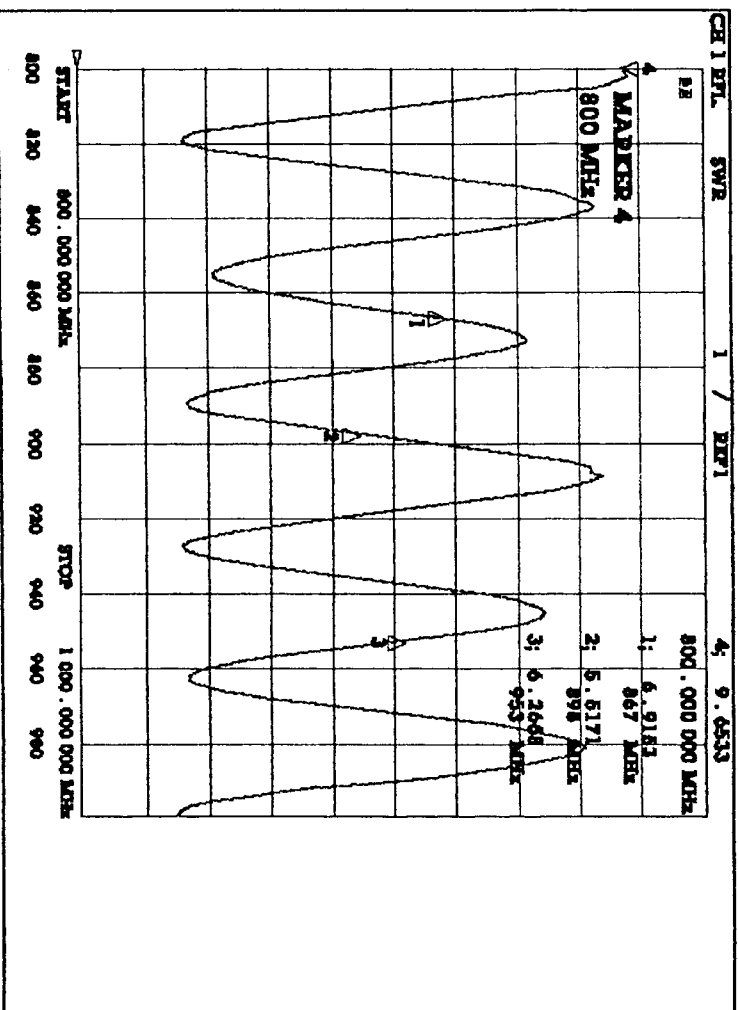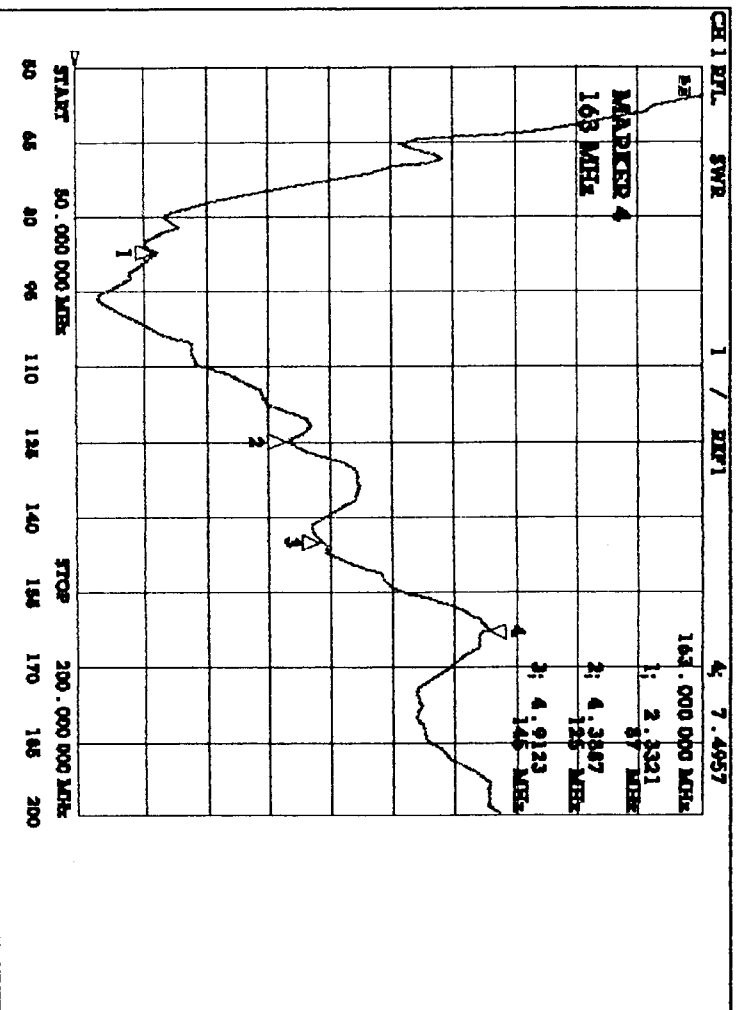

# SCAN STICK 2000 SWR CHART